




J D Jones & Co (P) Ltd

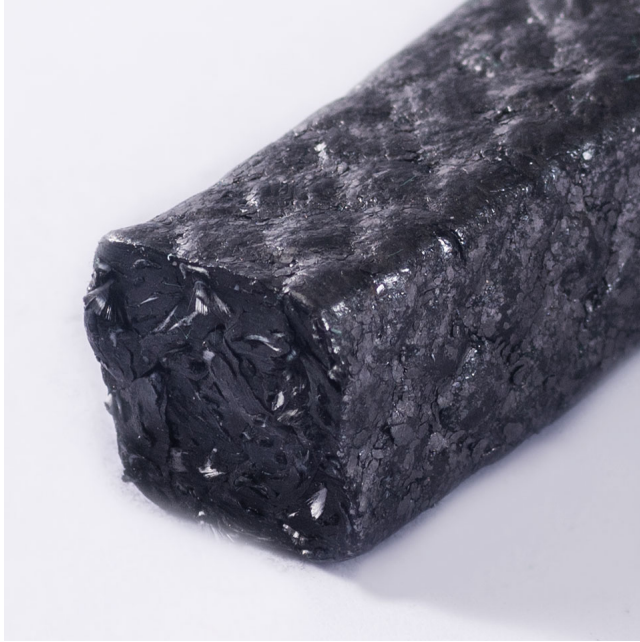

Pacmaan[®] Code 1785HG

Expanded PTFE graphited Gland Packing encapsulated over Glass fibre on each yarn

- A true multi-service packing
- Excellent chemical resistance, heat dissipating, sliding velocity, low coefficient of friction properties etc of PTFE graphite, with the abrasion, pressure resistance and mechanical strength of glass fibre
- Each expanded PTFE graphite yarn is encapsulated over glass fibre
- A soft, supple packing, non-abrasive in nature and gentle on the shaft

Ideal for mild slurry, chemical resistance

Service Media and Conditions	Chemical and abrasive slurries, liquor pumps, washers, sewage, solvents, aggressive fluids, water, boiler feed water, hot water, condensate, oils and greases, steam, paper mill applications etc
Temperature	280°C
Pressure	275 bar (static), 40 bar (rotary)
Shaft Speed	20 m/sec (rotary)
pH	0 to 14
Applications	Pumps, valves, mixers, agitators, plunger pumps