




J D Jones & Co (P) Ltd

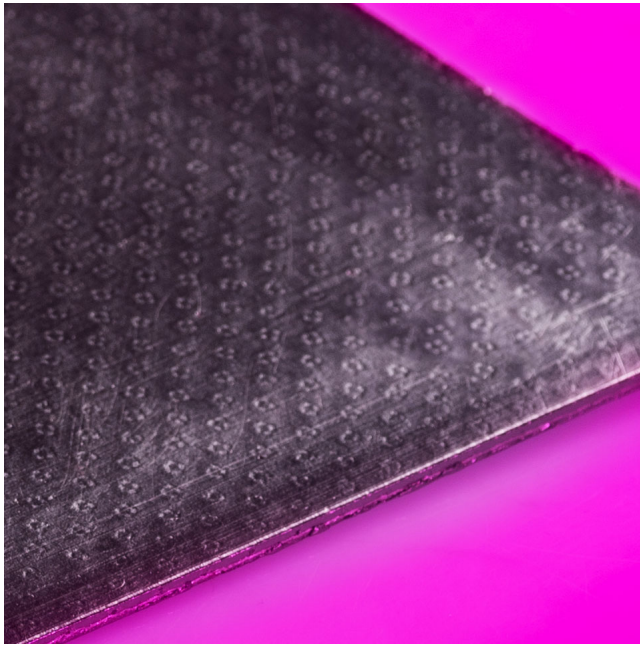

Pacmaan[®] NA 706T/TX Tanged Gasketing Sheet

High quality flexible graphite sheets with SS tanged inserts

- Flexible graphite foil mechanically clinched to 0.1 mm thick stainless steel tanged/perforated metal sheet
- Superb resistance to aggressive media, including steam up to 650°C
- Excellent replacement of conventional gasketing solutions
- Standard reinforcement of SS 304—For reinforcement of SS 316, please enquire for NA 706TX
- Available in thickness of 1 mm, 1.5 mm, 2 mm, 3 mm and 5 mm; width of 1000 x 1000 mm, 1500 x 1500 mm and 2000 x 2000 mm
- Special sizes upon request

Gaskets cut to your sizes/profile also available

Service Media and Conditions	Acid/alkali, hydrocarbons, superheated steam, oils and gases, chemicals etc
Temperature	-200°C to 650°C
Pressure	140 bar (static)
pH	0 to 14