




J D Jones & Co (P) Ltd

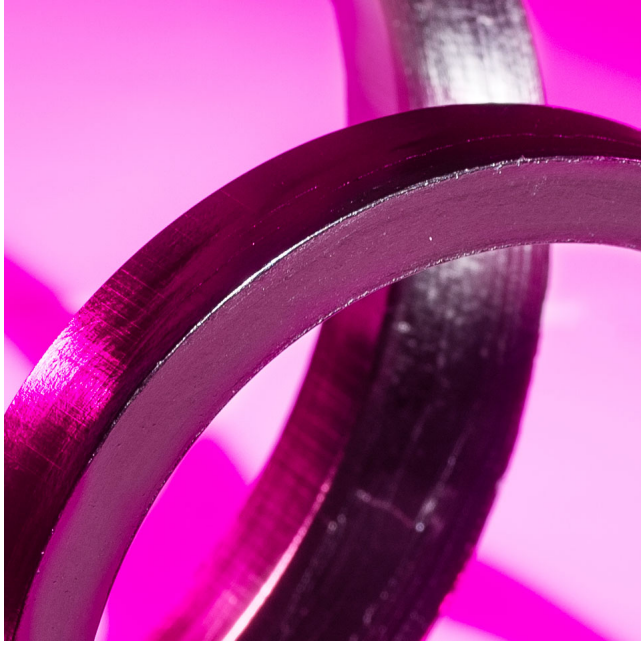

Pacmaan[®] NA 711

A flexible graphite sealing ring reinforced with SS sheet inside for MS HRH systems

- Ideal for main steam and hot reheat systems of steam turbines
- A high density gasket designed to take extreme pressures, temperatures and operating conditions
- The reinforcement of SS sheet inside enhances extrusion resistance and mechanical strength

Usually manufactured in angular cross section: other profiles as per the design of the turbine manufacturer

Service Media and Conditions	Superheated and saturated steam
Temperature	-240°C to 650°C
Pressure	300 bar (static)
pH	0 to 14
Applications	MS HRH systems of steam turbines