




*J D Jones & Co (P) Ltd*

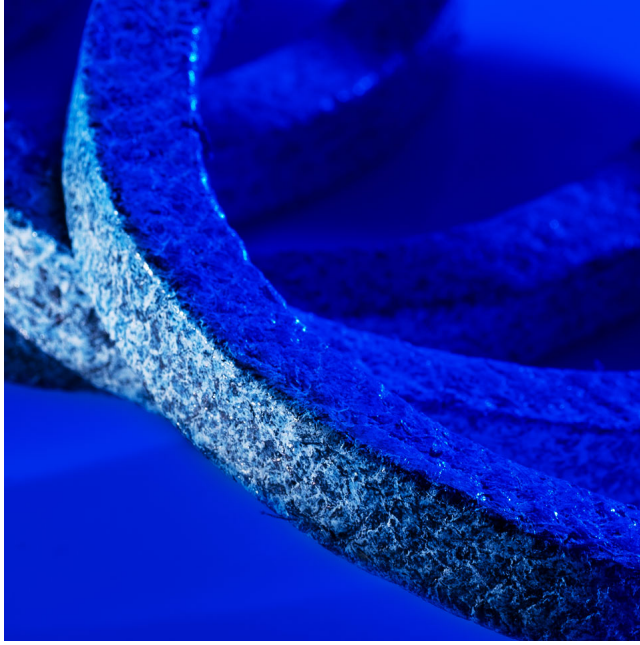

## Pacmaan<sup>®</sup> NA 717

Expanded pure graphite braided gland packing with a non-metallic reinforcement impregnated with PTFE and inert lubricants

- Low cost expanded pure graphite packing
- Dissipates heat without chemical hardening, resistant to practically all chemicals
- Dense, pliable packing with a high degree of resiliency
- Does not cause shaft wear
- Reduces flush water consumption

*Use of preformed rings recommended for optimum performance*

<b>Service Media and Conditions</b>	DM water and condensate, non-oxidising liquids and gases, dyes and chemicals, lube oil etc
<b>Temperature</b>	-200°C to 650°C
<b>Pressure</b>	280 bar (static), 30 bar (rotary)
<b>Shaft Speed</b>	20 m/sec (rotary)
<b>pH</b>	0 to 14
<b>Applications</b>	Pumps, low pressure valves