




*J D Jones & Co (P) Ltd*

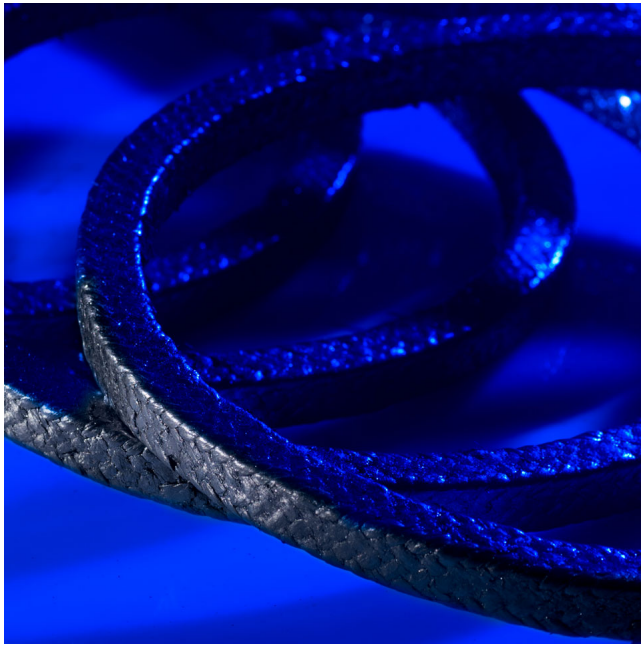

## Pacmaan<sup>®</sup> NA 718

Expanded pure graphite braided packing with a reinforcement of high grade structural carbon yarns in interlock braid

- A true multipurpose packing for a wide range of applications
- High grade carbon yarns criss-cross the packing to emerge at the corners, providing mechanical strength and extrusion resistance to the packing
- Excellent dry running capabilities reduce plant wide flush water use
- A corrosion inhibitor prevents stem pitting
- The packing fills into worn out surfaces and pittings, thus cutting out leak paths.
- Dissipates heat without chemical hardening, resistant to chemicals

*Available in rope and ring forms*

<b>Service Media and Conditions</b>	Caustics, water, steam, FCC catalyst and bottom slurry (refinery), DM water, all hydrocarbons, non-abrasive liquor, condensate, hypo, boiler feed water, fuel-lube oil, acid and alkali regeneration pumps
<b>Temperature</b>	-240°C to 650°C
<b>Pressure</b>	300 bar (static), 30 bar (rotary), 200 bar (reciprocating)
<b>Shaft Speed</b>	20 m/sec (rotary)
<b>pH</b>	0 to 14
<b>Applications</b>	Pumps, valves