




J D Jones & Co (P) Ltd

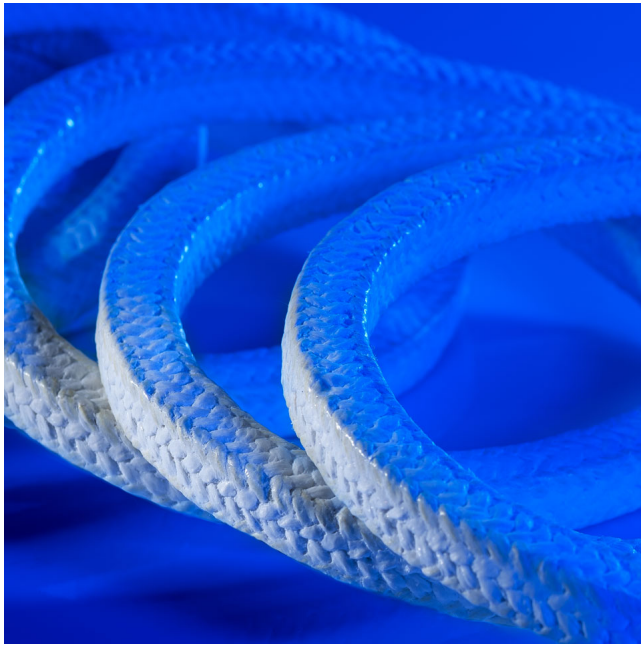

Pacmaan[®] NA 733

Acrylic fibre braided packing with para aramid fibre corners impregnated with PTFE and inert lubricant

- A special purpose packing for slurries with excellent elastic recovery properties
- Para aramid fibre on the corners enhances strength and chemical resistance
- Thorough impregnation of PTFE provides trouble free startup and low friction operation
- Easy to fit, easy to cut, doesn't heat up much

A non-staining and non-abrasive packing, can be used for high speed applications

Service Media and Conditions	Mining, sugar plant, pulp and paper industry, river water pumping
Temperature	260°C
Pressure	200 bar (static)
Shaft Speed	22 m/s (rotary)
pH	1 to 13
Applications	Pumps