




*J D Jones & Co (P) Ltd*

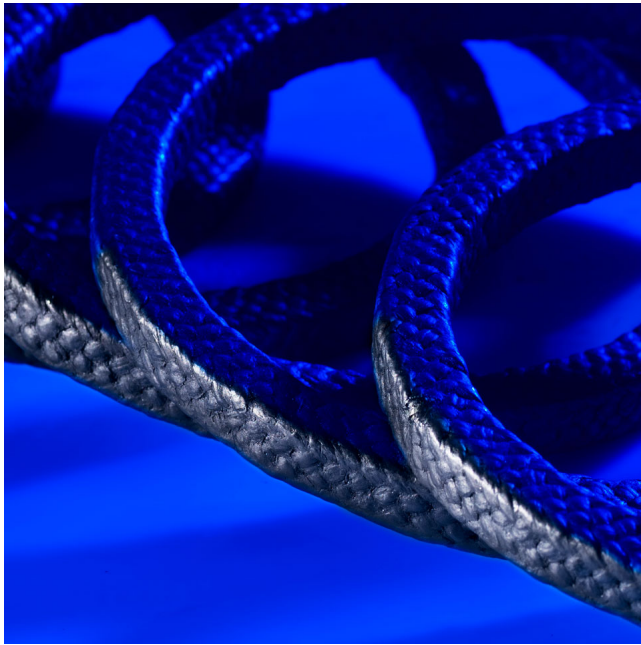

## Pacmaan<sup>®</sup> NA 748

Aramid fibre braided packing impregnated with PTFE

- One of the best sealing solutions for abrasive media such as stock, juice (sugar), slurries, fly ash, ash slurry etc
- High degree of resiliency and consistency of volume
- Special PTFE impregnation process to avoid shaft erosion and start-up friction
- Interlock braiding for high pressure and extrusion resistance
- Shaft/sleeve hardness should be > 45 HRC; if not, please consult us
- Addition of graphite improves heat dissipating properties

*Available in rope and ring forms*

<b>Service Media and Conditions</b>	Magma, massequite, juice pumps, stock, ash slurry, mud slurry, fly ash water, sewage, highly abrasive bleach or wood pulp, wash water, raw water and turbid water, chemical slurries etc
<b>Temperature</b>	-100°C to 280°C
<b>Pressure</b>	200 bar (static), 40 bar (rotary), 200 bar (reciprocating)
<b>Shaft Speed</b>	222 m/sec (rotary), 10 m/sec (reciprocating)
<b>pH</b>	1 to 13
<b>Applications</b>	Pump, agitators